

Installation Instructions

Before you begin



CAUTION: Risk of personal injury or product damage. Handle with care. Vitreous china can break or chip if the product is handled carelessly

Installation must be in accordance with Plumbing Code Australia, relevant local plumbing code, AS/NZS 3500.1 and AS/NZS 3500.2.

If the existing toilet does not have a supply shut-off valve below the cistern, install one before installing the new toilet.

Please inspect your new toilet suite before installation. No claims will be accepted after installation is completed.

Contents: Pan. Seat.

Note: Ensure that the inlet water pressure does not exceed 500kPA


These products comply with 1172.1 and AS1172.2 requirements.

1. HOW TO CHOOSE THE BEND PIPE




Define the position of the connector, place the connector onto the pan, and position the connector between the outlet and waste pipe. Installation instructions are supplied with each respective pan connector.


2. Make the positions of the floor fixing kit holes.

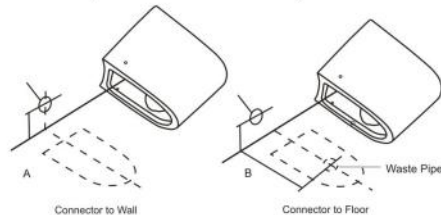

3. Drill fixing holes at the marked locations on the floor and insert the anchors where required.




4. Place a washer onto each of the hexagon screws and fix the brackets to the floor, position the toilet in the marked location. while ensuring an effective connection is made with the pan connector.




5. Ensure that this pan is level.



6. Fix the pan to the floor using the screws and caps provided. Silicone the pan to the floor and remove excess sealant.

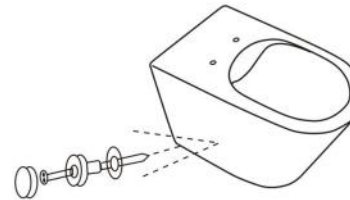

7. Install the seat as per the supplied seat instructions. Make final connection of water supply hose to shut-off valve. test the system for leaks. Apply a suitable sealant between the pan and adjacent surfaces.



Your toilet suite is now installed